


Technical Data Sheet

SUNSORB 477

Specifications

Item	Specification
Appearance	Yellowish viscous liquid
Viscosity (20°C, S63, 30rpm, cps)	2,000 ~ 4,000
Water Content (%)	Max. 1.0
λ_{max} (nm)	358 \pm 5

UV ABSORBANCE SPECTRUM

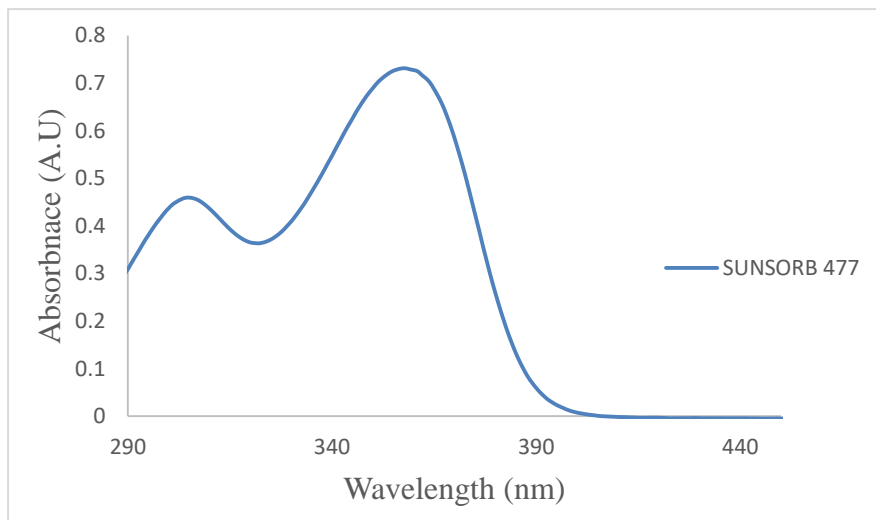

Applications

- (1) Window and construction film
- (2) PPF
- (3) Exterior wood coatings and penetrating finishes
- (4) Indoor solvent borne and UV cured wood coatings, waxes and wood care products
- (5) Polishes, rejuvenators for plastics and leather
- (6) Coating on plastics and vinyl
- (7) OVP UV blocking varnishes on prints
- (8) Glass coating and glass bonding layer

Storage

Inside storage should be in a cool well-ventilated location. Keep away from all possible sources of ignition. Keep away from heat, steam pipe or direct sunlight. Keep container tightly closed.