




Cyclohexane	15%
Ethyl Acetate	15%
n-Hexane	6%
Methanol	0.6%
Methylene Chloride	38%
Water	<0.01%

## UV Absorption

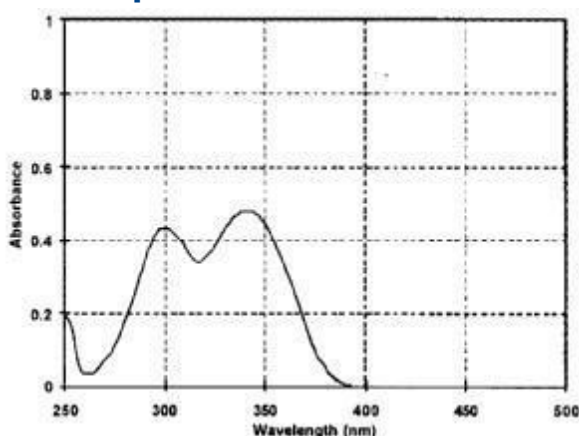

Absorption Spectrum (10mg/l, Chloroform)

## Applications

1. Unsaturated Polyester: 0.2-0.5wt% based on polymer weight
2. PVC
  - Rigid PVC: 0.2-0.5wt% based on polymer weight
  - Plasticized PVC: 0.1-0.3wt% based on polymer weight
3. Polyurethane: 0.2-1.0wt% based on polymer weight
4. Polyamide: 0.2-0.5wt% based on polymer weight

## Delivery & Storage

**Package**      SUNSORB 329 is available in powder form in a 20 kg (44.1 LB) fiber drum, net weight, with an inner PE liner

<b>Storage</b>	This product may be stored for one year in a sealed container. Containers should be stored in a cool, dry area. Extended storage at elevated temperatures or exposure to direct heat or sunlight could reduce product life. Keep containers sealed when not in use	<b>Shelf Life</b>	2 years
----------------	--	-------------------	---------